

WALK THROUGH METAL DETECTOR

ZK-D2180S

18 Zones Standard

Features

- Eighteen mutual over-lapping detecting zones, Simultaneous alarm from multi- zones
- Small LCD screen, English operating software, easy to operate
- Sensitivity adjustable: Each zone has 256 sensitivity level
- Sound & LED alarm: Both Side LED indicator, easily show where the metal is
- Automatically count passengers and alarm times
- Alarm strength indicator on control panel
- Password protection, only the authorized person can operate.
- Easy assembly: designed with only 2 pieces cables and 8 screws, simply-to-follow instruction.
- Harmless to human body: is harmless with heart pacemaker, pregnant women, magnetic floppy, recording tapes, etc.
- Using high density fireproof material
- Program Self-diagnostic when power on, no need initial or periodic calibration
- Modularization design, easy for maintenance and replacement.
- Sensitivity Test piece: One yuan Coin, omnidirectional detection
- 4-8 hours backup battery (Option)



Specification

Power Supply	AC85 V-264 V
Working temperature	-20 °C --+50 °C
Working Frequency	4KHZ—8KHZ
Standard External size	2200mm(H)X800mm(W)X580mm(D)
Standard Internal size	2010mm(H)X700mm(W)X500mm(D)
Package size for door panels	2260*650*260mm *1ctn
Package size for control unit	780*390*250 mm*1ctn
Gross weight	70KG


Application



Airport




Government office

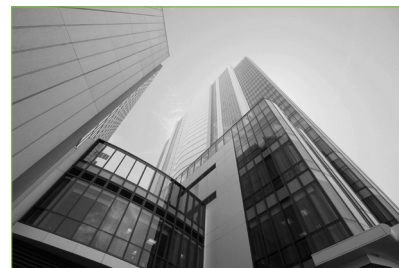


Bank



Exhibition center

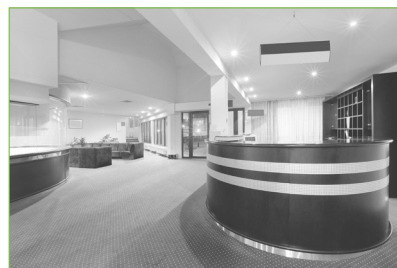

Hotel

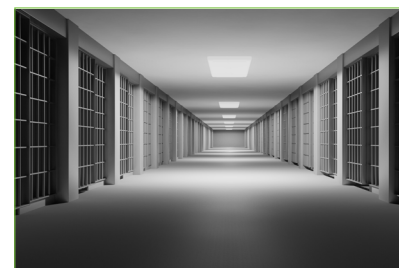

Prison



ZKTeco South Africa
www.zkteco.co.za
E-mail: sales@zkteco.co.za

© Copyright 2016. ZKTeco Inc. ZKTeco Logo is a registered trademark of ZKTeco or a related company. All other product and company names mentioned are used for identification purposes only and may be the trademarks of their respective owners. All specifications are subject to change without notice. All rights reserved.

